(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 21 April 2005 (21.04.2005)

PCT

(10) International Publication Number WO 2005/035977 A1

(51) International Patent Classification⁷: F03B 17/06. 13/26

(21) International Application Number:

PCT/PH2004/000010

(22) International Filing Date: 13 October 2004 (13.10.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 1-2003-000483

13 October 2003 (13.10.2003) PH

(71) Applicant and

- (72) Inventor: URSUA, Isidro, U. [PH/PH]; 7 Sunrise Street, SSS Village, Concepcion Dos, Markina City 1811 (PH).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,

GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, 7.W.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: TURBINE HOUSING AND FLOATATION ASSEMBLY

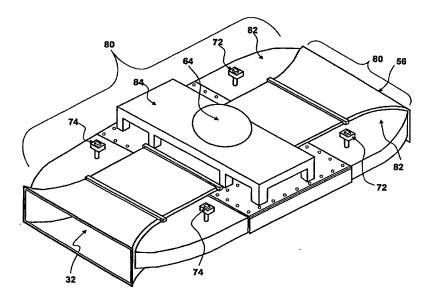

(57) Abstract: The invention relates to a turbine housing comprising a housing (2) body having a first end (8), second end (12) and a central region (4), wherein the housing body comprises a bore running therethrough, and wherein the bore tapers from a first larger cross-section at and/or in the region of the first and second ends to a second, smaller cross-section towards the central region. The turbine housing may also include a fluid flow restriction means arranged (34, 40) in use to restrict fluid speed, direction or location within the turbine housing.

WO 2005/035977 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.